

**Body: XMA-1001**

**Fishing Neck Length (in):** 30

**Fishing Neck Diameter (in):** 4.75

**Upset Length (in):** 11.25

**Flow-By Area (sq.in):** 5.10

\* Includes cutters

**Overall Length (in):** 67

**Bottom Hole Length (in):** 24

**Weight (lbs):** 292

**Total Dressed Weight (lbs):** 310

**Makeup Torque (ft.lbs)\*:** 9986

\* Typical connection NC-38  
 confirm for specific tool

**Sealed Bearing Cutter:  
 XMA-1040**

**Length (in):** 9.250

**Approx. Diameter (in):** 1.9

**Gauge Length (in):** 2.44


**Weight-each (lbs):** 5.9

**Weight per set (lbs):** 17.7

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 20.5 lbs

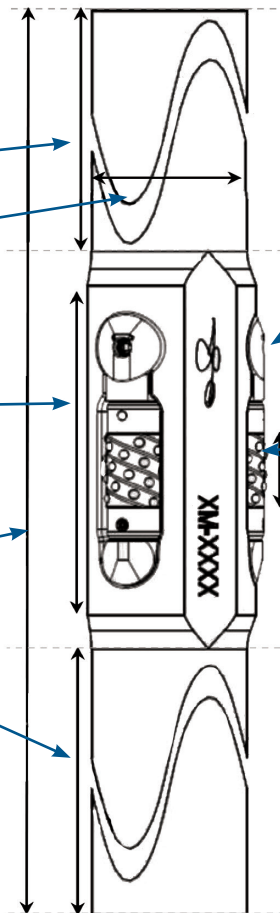


**Boxed Dims.:** 255 x 295 x 1820 mm

**Tool Gauge (in):** 5.875

**ID (in):** 1.50

**Upset Diameter (in):** 5.80



Drawing not to scale

**Serial Numbers**

Body: XM- \_\_\_\_\_

Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1001**

**Fishing Neck Length (in):** 30

**Fishing Neck Diameter (in):** 4.75

**Upset Length (in):** 11.25

**Flow-By Area (sq.in):** 5.90

\* Includes cutters

**Overall Length (in):** 67

**Bottom Hole Length (in):** 24

**Weight (lbs):** 292

**Total Dressed Weight (lbs):** 311

**Makeup Torque (ft.lbs)\*:** 9986

\* Typical connection NC-38  
 confirm for specific tool

**Sealed Bearing Cutter:  
 XMA-1050**

**Length (in):** 9.250

**Approx. Diameter (in):** 2.0

**Gauge Length (in):** 2.44


**Weight-each (lbs):** 6.4

**Weight per set (lbs):** 19.2

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 22.0 lbs

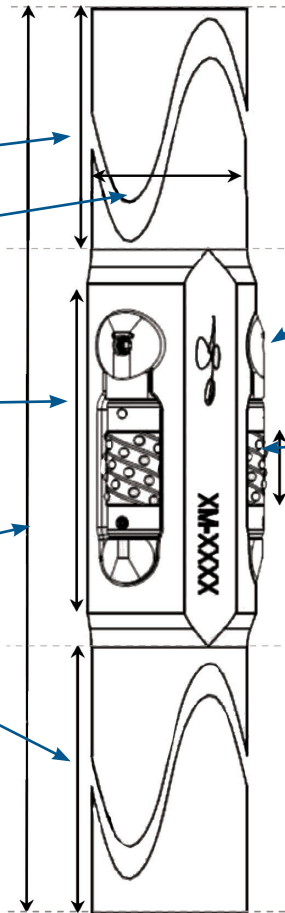


**Boxed Dims.:** 255 x 295 x 1820 mm

**Tool Gauge (in):** 6

**ID (in):** 1.5

**Upset Diameter (in):** 5.30



Drawing not to scale

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1001**

**Fishing Neck Length (in):** 30

**Fishing Neck Diameter (in):** 4.75

**Upset Length (in):** 11.25

**Flow-By Area (sq.in):** 6.75

\* Includes cutters

**Overall Length (in):** 67

**Bottom Hole Length (in):** 24

**Weight (lbs):** 292

**Total Dressed Weight (lbs):** 311

**Makeup Torque (ft.lbs)\*:** 9986


\* Typical connection NC-38  
 confirm for specific tool

**Boxed Dims.:** 255 x 295 x 1820 mm

**Tool Gauge (in):** 6.125

**ID (in):** 1.5

**Upset Diameter (in):** 5.30

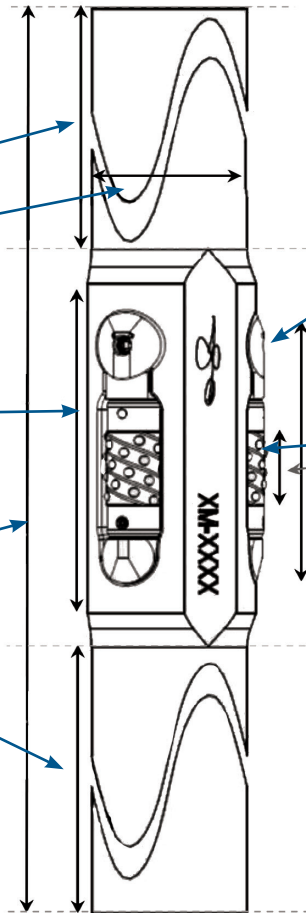

**Sealed Bearing Cutter: XMA-1060**

**Length (in):** 9.25

**Approx. Diameter (in):** 2.0

**Gauge Length (in):** 2.44

**Weight-each (lbs):** 6.4

**Weight per set (lbs):** 19.3

Optimal Performance\*\* up to 1500 string krevs or 194 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 22.1 lbs

**Serial Numbers**

Body: XM-\_\_\_\_\_

Cutters: E-\_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to change at any time.

Drawing not to scale

**Body: XMA-1076**

**Fishing Neck Length (in):** 30

**Fishing Neck Diameter (in):** 4.75

**Upset Length (in):** 11.25

**Flow-By Area (sq.in):** 5.71

\* Includes cutters

**Overall Length (in):** 67

**Bottom Hole Length (in):** 24

**Weight (lbs):** 301

**Total Dressed Weight (lbs):** 319

**Makeup Torque (ft.lbs)\*:** 9986


\* Typical connection NC-38  
 confirm for specific tool

**Boxed Dims.:** 255 x 295 x 1820 mm

**Tool Gauge (in):** 6.125

**ID (in):** 1.50

**Upset Diameter (in):** 5.60

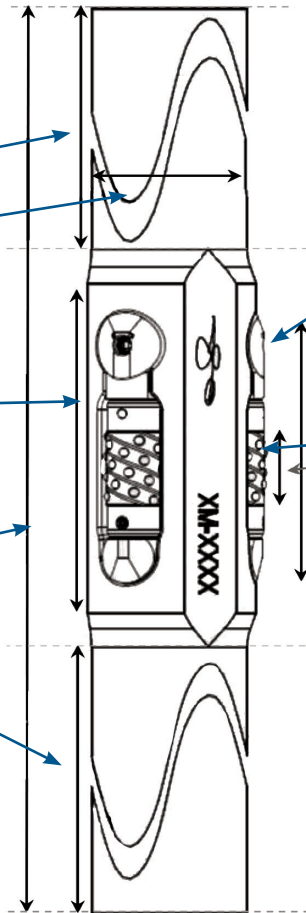

**Sealed Bearing Cutter:  
 XMA-1040**

**Length (in):** 9.250

**Approx. Diameter (in):** 1.9

**Gauge Length (in):** 2.44

**Weight-each (lbs):** 5.9

**Weight per set (lbs):** 17.7

Optimal Performance\*\* up to 1400  
 string krevs or 194 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters


Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 20.5 lbs

**Serial Numbers**

Body: XM-\_\_\_\_\_

Cutters: E-\_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.



Drawing not to scale



**Body: XMA-1076**

Fishing Neck Length (in): 30

Fishing Neck Diameter (in): 4.75

Upset Length (in): 11.25

Flow-By Area (sq.in): 6.56

\* Includes cutters

Overall Length (in): 67

Bottom Hole Length (in): 24

Weight (lbs): 301

Total Dressed Weight (lbs): 320

Makeup Torque (ft.lbs)\*: 9986


\* Typical connection NC-38  
 confirm for specific tool

Boxed Dims.: 255 x 295 x 1820 mm

Tool Gauge (in): 6.625

ID (in): 1.50

Upset Diameter (in): 5.60

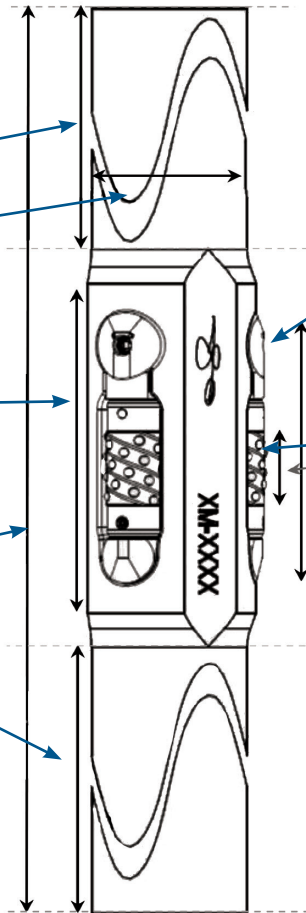

**Sealed Bearing Cutter: XMA-1050**

Length (in): 9.250

Approx. Diameter (in): 2.0

Gauge Length (in): 2.44

Weight-each (lbs): 6.4

Weight per set (lbs): 19.2

Optimal Performance\*\* up to 1500  
 string krevs or 194 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters


Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 22.0 lbs

**Serial Numbers**

Body: XM-\_\_\_\_\_

Cutters: E-\_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.



Drawing not to scale

**Body: XMA-1076**

Fishing Neck Length (in): 30

Fishing Neck Diameter (in): 4.75

Upset Length (in): 11.25

Flow-By Area (sq.in): 7.47

\* Includes cutters

Overall Length (in): 67

Bottom Hole Length (in): 24

Weight (lbs): 301

Total Dressed Weight (lbs): 320

Makeup Torque (ft.lbs)\*: 9986

\* Typical connection NC-38  
 confirm for specific tool

**Sealed Bearing Cutter:  
 XMA-1060**

Length (in): 9.250

Approx. Diameter (in): 2.0

Gauge Length (in): 2.44


Weight-each (lbs): 6.4

Weight per set (lbs): 19.3

Optimal Performance\*\* up to 1500  
 string krevs or 194 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 275 x 130 x 310 mm, 22.1 lbs

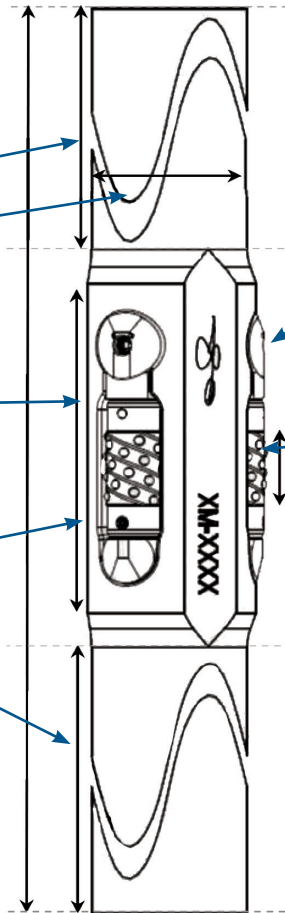


Boxed Dims.: 255 x 295 x 1820 mm

Tool Gauge (in): 6.35

ID (in): 1.50

Upset Diameter (in): 5.60



Drawing not to scale

**Serial Numbers**

Body: XM-\_\_\_\_\_

Cutters: E-\_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.