

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.745

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 78.5

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2336

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 17

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

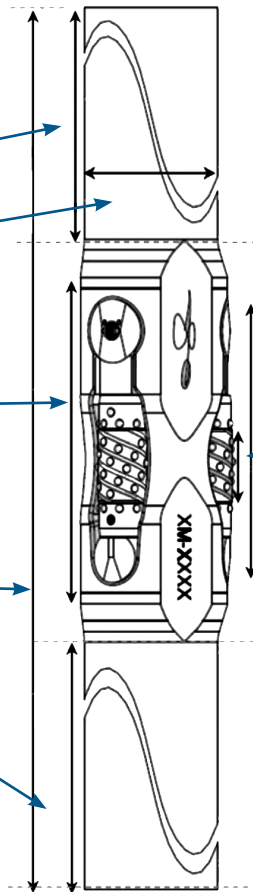

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-3025**

**Length (in):** 17.500

**Approx. Diameter (in):** 4.5

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 52.5

**Weight per set (lbs):** 157.5

Optimal Performance\*\* up to 1200  
 string krevs or 167 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 176.5 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 77.20

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2344

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 17.25

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

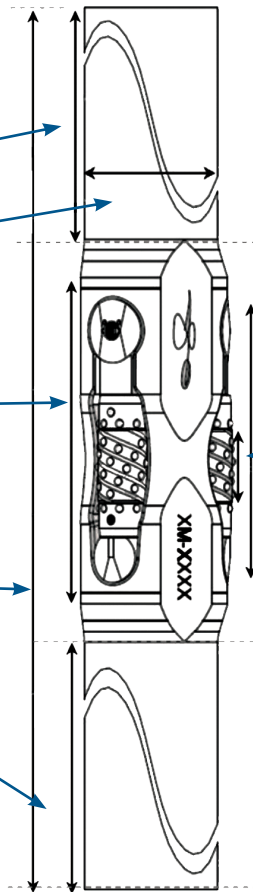

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-3040**

**Length (in):** 17.500

**Approx. Diameter (in):** 4.8

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 55.3

**Weight per set (lbs):** 165.9

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 184.9 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 79.51

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2350

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 17.375

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

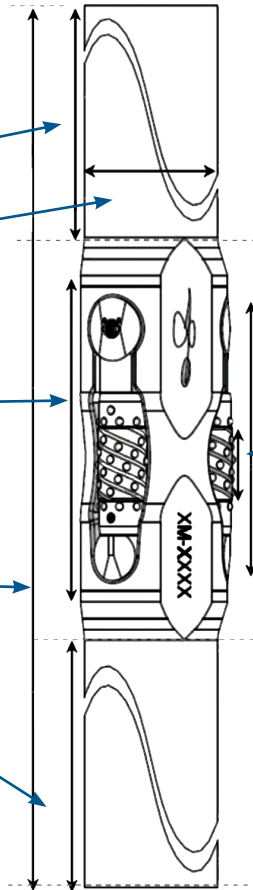

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-3045**

**Length (in):** 17.500

**Approx. Diameter (in):** 4.9

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 57.4

**Weight per set (lbs):** 172.2

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 191.2 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 81.81

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2355

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 17.5

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

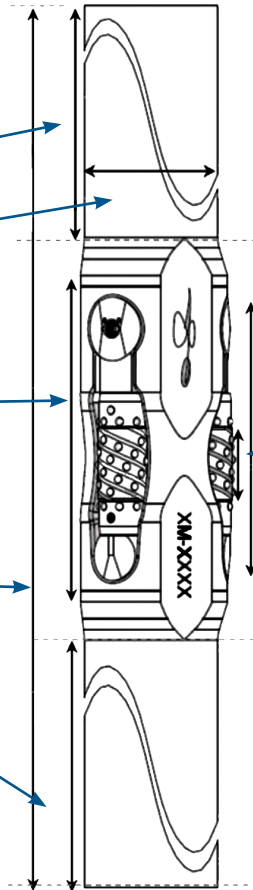

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-3050**

**Length (in):** 17.500

**Approx. Diameter (in):** 5.0

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 59.0

**Weight per set (lbs):** 177.0

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 196.0 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.



**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 89.96

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2354

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 17.875

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

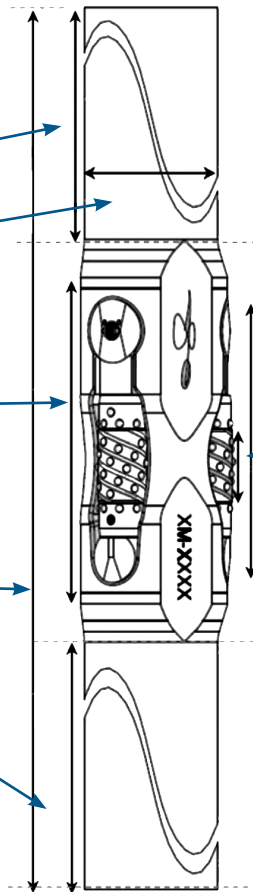

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-4012**

**Length (in):** 17.500

**Approx. Diameter (in):** 4.9

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 58.8

**Weight per set (lbs):** 176.4

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 195.4 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 92.14

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2354

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 18

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

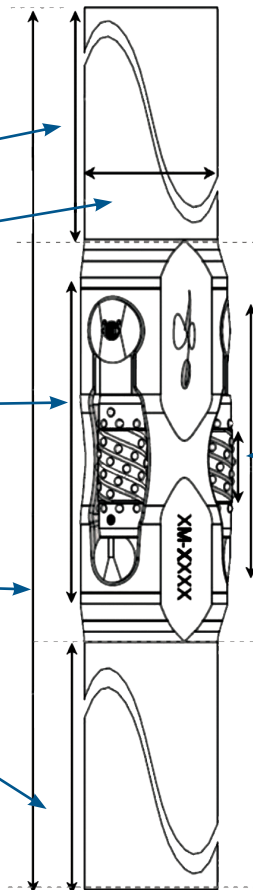

**Sealed Bearing Cutter:  
 XMA-4025**

**Length (in):** 17.500

**Approx. Diameter (in):** 5.0

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 60.4

**Weight per set (lbs):** 181.2

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM


\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 200.2 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.



Drawing not to scale

**Body: XMA-3001**

**Fishing Neck Length (in):** 29

**Fishing Neck Diameter (in):** 9.75

**Upset Length (in):** 21.00

**Flow-By Area (sq.in):** 94.40

\* Includes cutters

**Overall Length (in):** 98

**Bottom Hole Length (in):** 39

**Weight (lbs):** 2178

**Total Dressed Weight (lbs):** 2366

**Makeup Torque (ft.lbs)\*:** 74529


\* Typical connection 7<sup>5/8</sup>" Reg  
 confirm for specific tool

**Boxed Dims.:** 570 x 600 x 2800 mm

**Tool Gauge (in):** 18.125

**ID (in):** 3.15

**Upset Diameter (in):** 14.90

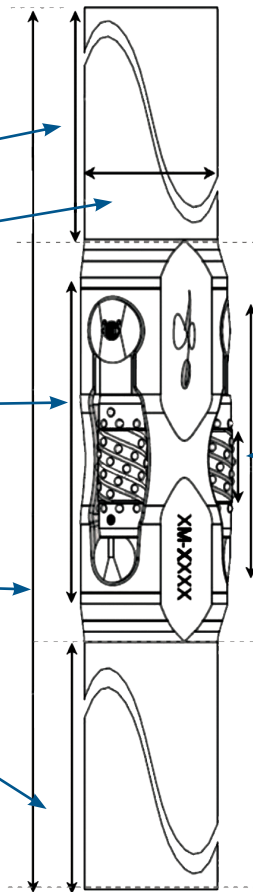

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-4030**

**Length (in):** 17.500

**Approx. Diameter (in):** 5.1

**Gauge Length (in):** 3.88

**Weight-each (lbs):** 62.5

**Weight per set (lbs):** 187.5

Optimal Performance\*\* up to 1300  
 string krevs or 181 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 500 x 240 x 530 mm, 206.5 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.