

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 7.43

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 657

**Makeup Torque (ft.lbs)\*:** 32277


\* Typical connection NC-50  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 7.75

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

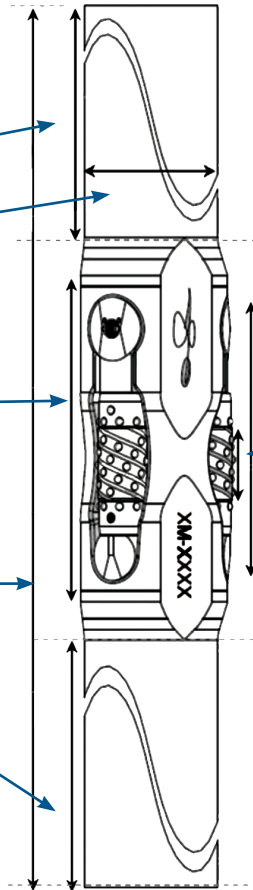

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1540**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.6

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 16.1

**Weight per set (lbs):** 48.3

Optimal Performance\*\* up to 1600  
 string krevs or 222 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 58.3 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_

Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 7.43

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 657

**Makeup Torque (ft.lbs)\*:** 28021


\* Typical connection NC-46  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 7.75

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

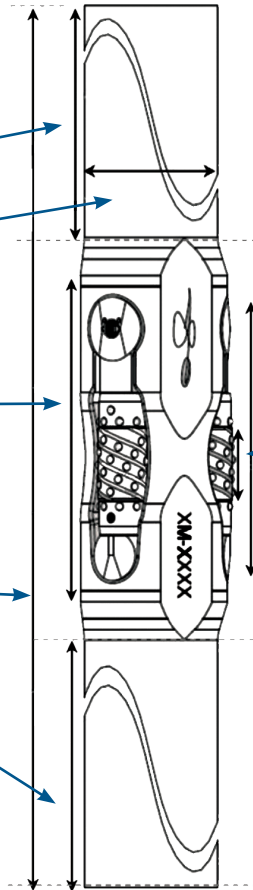

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1540**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.6

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 16.1

**Weight per set (lbs):** 48.3

Optimal Performance\*\* up to 1600  
 string krevs or 222 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 58.3 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 8.52

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 6660

**Makeup Torque (ft.lbs)\*:** 32277


\* Typical connection NC-50  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 7.875

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

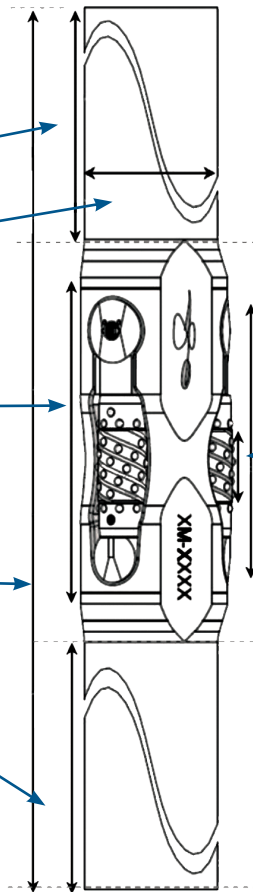

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1550**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.8

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 17.0

**Weight per set (lbs):** 51.0

Optimal Performance\*\* up to 1600  
 string krevs or 222 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 61.0 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 8.52

\* Includes cutters

**Overall Length (in):** 74.5

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 6660

**Makeup Torque (ft.lbs)\*:** 28201


\* Typical connection NC-46  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 7.825

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

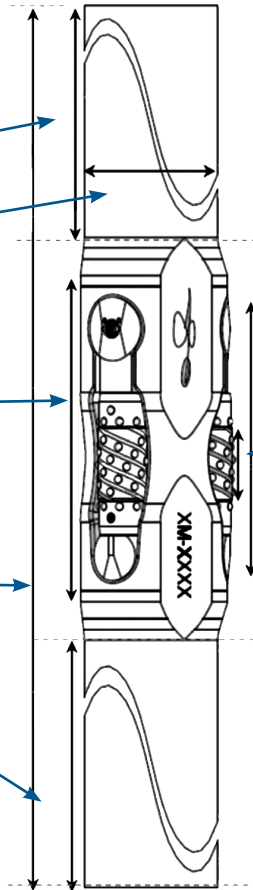

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1550**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.8

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 17.0

**Weight per set (lbs):** 51.0

Optimal Performance\*\* up to 1600  
 string krevs or 222 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 61.0 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 9.74

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 658

**Makeup Torque (ft.lbs)\*:** 32277


\* Typical connection NC-50  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 8

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

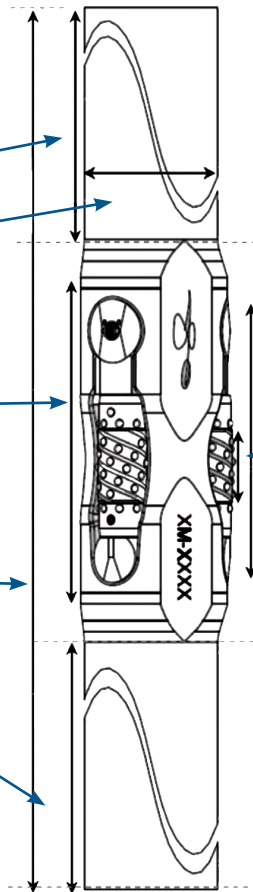

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1555**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.6

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 16.3

**Weight per set (lbs):** 48.9

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 58.9 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 9.74

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 658

**Makeup Torque (ft.lbs)\*:** 28021


\* Typical connection NC-46  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 8

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

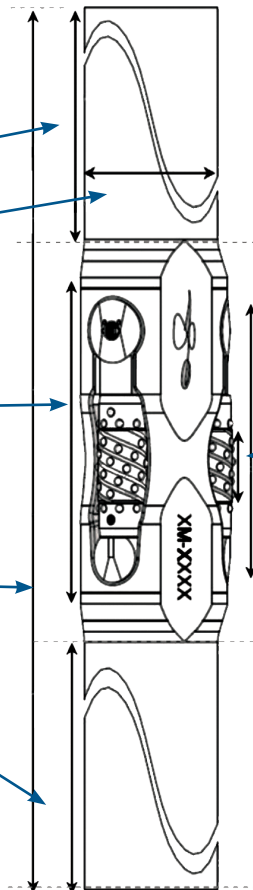

**Sealed Bearing Cutter:  
 XMA-1555**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.6

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 16.3

**Weight per set (lbs):** 48.9

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 58.9 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

Drawing not to scale

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 14.40

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 661

**Makeup Torque (ft.lbs)\*:** 32277


\* Typical connection NC-50  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 8.25

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

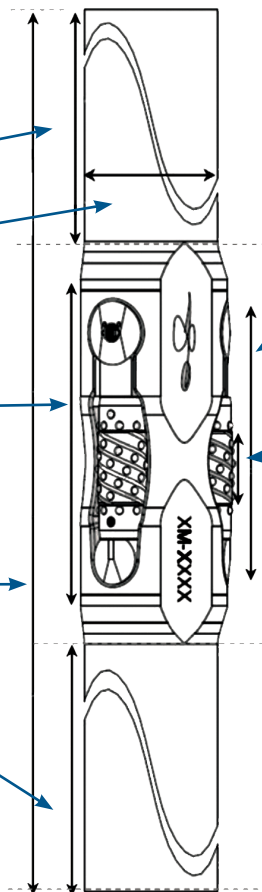

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1560**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.8

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 17.3

**Weight per set (lbs):** 51.9

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 61.9 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.

**Body: XMA-1426**

**Fishing Neck Length (in):** 24

**Fishing Neck Diameter (in):** 6.50

**Upset Length (in):** 15.38

**Flow-By Area (sq.in):** 12.40

\* Includes cutters

**Overall Length (in):** 74

**Bottom Hole Length (in):** 32

**Weight (lbs):** 609

**Total Dressed Weight (lbs):** 6661

**Makeup Torque (ft.lbs)\*:** 28021


\* Typical connection NC-46  
 confirm for specific tool

**Boxed Dims.:** 360 x 410 x 2080 mm

**Tool Gauge (in):** 8.25

**ID (in):** 1.50

**Upset Diameter (in):** 7.13

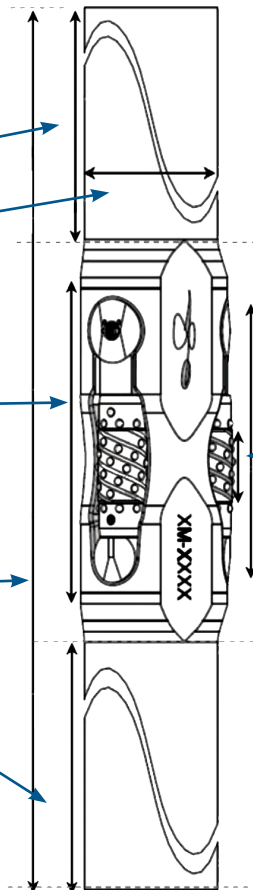

Drawing not to scale

**Sealed Bearing Cutter:  
 XMA-1560**

**Length (in):** 13.375

**Approx. Diameter (in):** 2.8

**Gauge Length (in):** 2.75

**Weight-each (lbs):** 17.3

**Weight per set (lbs):** 51.9

Optimal Performance\*\* up to 1500  
 string krevs or 208 hrs @ 120 RPM

\*\* Sealed Bearing will continue to operate beyond  
 optimal performance - Reservoir Group does not  
 advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:  
 340 x 140 x 410 mm, 61.9 lbs

**Serial Numbers**

Body: XM- \_\_\_\_\_  
 Cutters: E- \_\_\_\_\_

Values detailed are nominal. Manufacturer reserves the right to  
 change at any time.