

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 151.04

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3418

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890 x 2800 mm

Tool Gauge (in): 23.75

ID (in): 3.15

Upset Diameter (in): 21.40

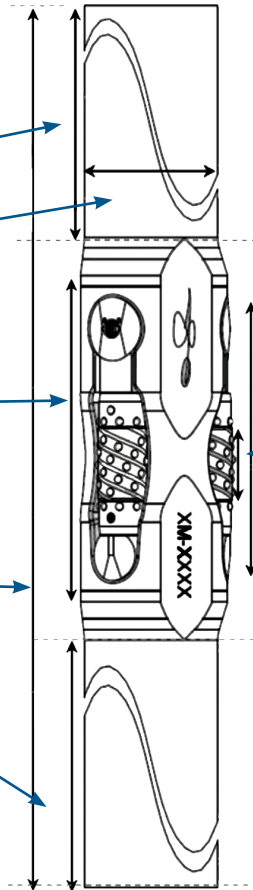

**Sealed Bearing Cutter:
 XMA-3040**

Length (in): 17.500

Approx. Diameter (in): 4.8

Gauge Length (in): 3.88

Weight-each (lbs): 55.3

Weight per set (lbs): 165.9

Optimal Performance** up to 900 string krevs or 125 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 184.9 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 154.68

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3424

Total Dressed Weight (lbs): 3424

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 23.875

ID (in): 3.15

Upset Diameter (in): 21.40

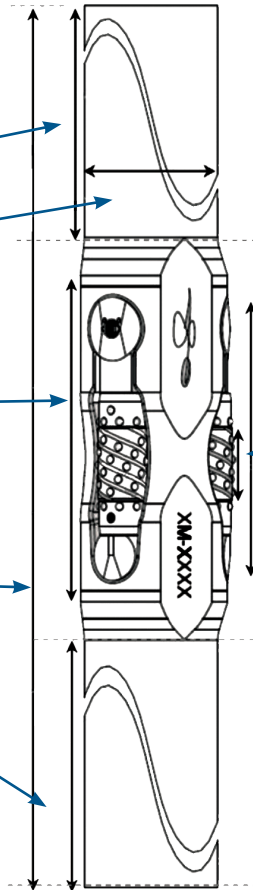

**Sealed Bearing Cutter:
 XMA-3045**

Length (in): 17.500

Approx. Diameter (in): 4.9

Gauge Length (in): 3.88

Weight-each (lbs): 57.4

Weight per set (lbs): 172.2

Optimal Performance** up to 1100 string krevs or 139 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 191.2 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 158.30

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3424

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 24

ID (in): 3.15

Upset Diameter (in): 21.40

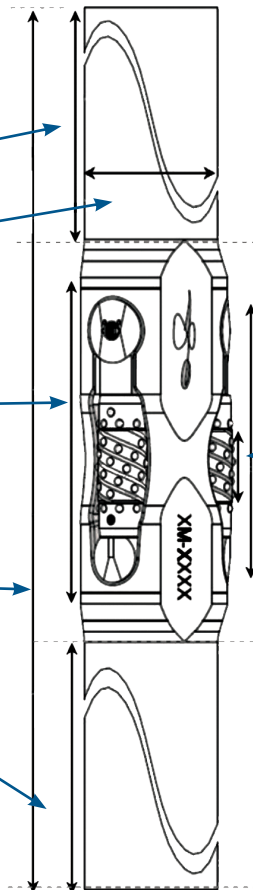

**Sealed Bearing Cutter:
 XMA-3050**

Length (in): 17.500

Approx. Diameter (in): 5.0

Gauge Length (in): 3.88

Weight-each (lbs): 59.0

Weight per set (lbs): 177.0

Optimal Performance** up to 1100 string krevs or 139 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 196.0 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 170.20

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3428

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 24.375

ID (in): 3.15

Upset Diameter (in): 21.40

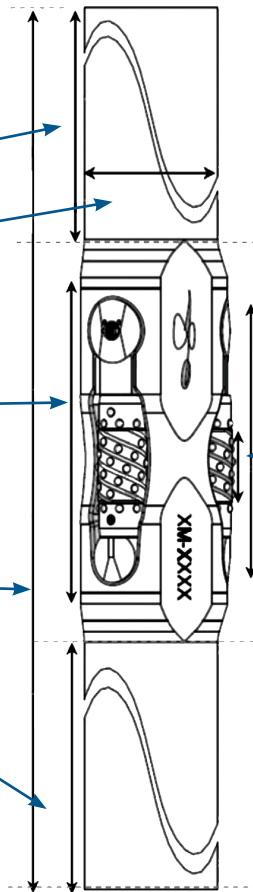

**Sealed Bearing Cutter:
 XMA-4012**

Length (in): 17.500

Approx. Diameter (in): 4.9

Gauge Length (in): 3.88

Weight-each (lbs): 58.8

Weight per set (lbs): 176.4

Optimal Performance** up to 1000 string krevs or 139 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 195.4 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 173.80

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3428

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 24.5

ID (in): 3.15

Upset Diameter (in): 21.40

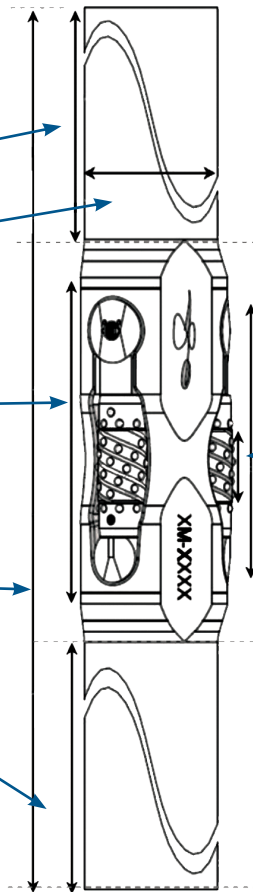

**Sealed Bearing Cutter:
 XMA-4025**

Length (in): 17.500

Approx. Diameter (in): 5.0

Gauge Length (in): 3.88

Weight-each (lbs): 60.4

Weight per set (lbs): 181.2

Optimal Performance** up to 1000 string krevs or 139 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 200.2 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 177.39

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3440

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 24.625

ID (in): 3.15

Upset Diameter (in): 21.40

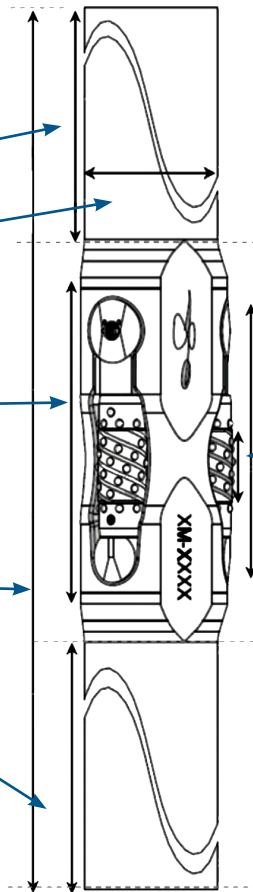

Drawing not to scale

**Sealed Bearing Cutter:
 XMA-4030**

Length (in): 17.500

Approx. Diameter (in): 5.1

Gauge Length (in): 3.88

Weight-each (lbs): 62.5

Weight per set (lbs): 187.5

Optimal Performance** up to 1000 string krevs or 139 hrs @ 100 RPM

** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 206.5 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 189.59

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3435

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 25

ID (in): 3.15

Upset Diameter (in): 24.40

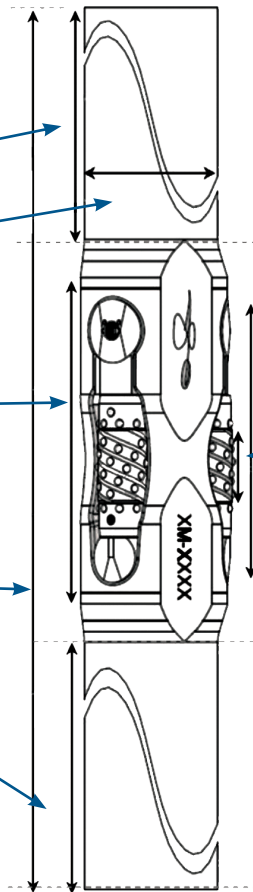

**Sealed Bearing Cutter:
 XMA-4050**

Length (in): 17.500

Approx. Diameter (in): 5.0

Gauge Length (in): 3.88

Weight-each (lbs): 61.1

Weight per set (lbs): 183.3

Optimal Performance** up to 900 string krevs or 125 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 203.3 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale

Body: XMA-6001

Fishing Neck Length (in): 27.5

Fishing Neck Diameter (in): 9.75

Upset Length (in): 22.00

Flow-By Area (sq.in): 212.5

* Includes cutters

Overall Length (in): 95

Bottom Hole Length (in): 34

Weight (lbs): 3252

Total Dressed Weight (lbs): 3435

Makeup Torque (ft.lbs)*: 74529


* Typical connection 7^{5/8}" Reg confirm for specific tool

Boxed Dims.: 810 x 890x 2800 mm

Tool Gauge (in): 26

ID (in): 3.15

Upset Diameter (in): 21.40

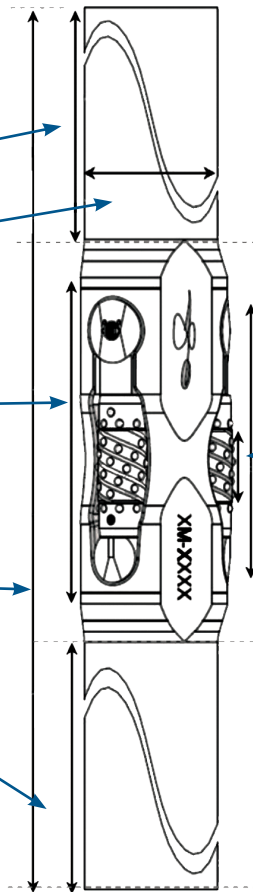

Sealed Bearing Cutter: XMA-9050

Length (in): 17.500

Approx. Diameter (in): 6.0

Gauge Length (in): 3.88

Weight-each (lbs): 80.0

Weight per set (lbs): 240.0

Optimal Performance** up to 1100 string krevs or 153 hrs @ 100 RPM


** Sealed Bearing will continue to operate beyond optimal performance - Reservoir Group does not advocate tripping specifically to change out cutters

Cutter Boxed Dimensions:
 500 x 240 x 530 mm, 264.0 lbs

Serial Numbers

Body: XM- _____
 Cutters: E- _____

Values detailed are nominal. Manufacturer reserves the right to change at any time.



Drawing not to scale